




LANKOFORCE® HS HIGH STRENGTH WITH DYNEEMA® JACKET

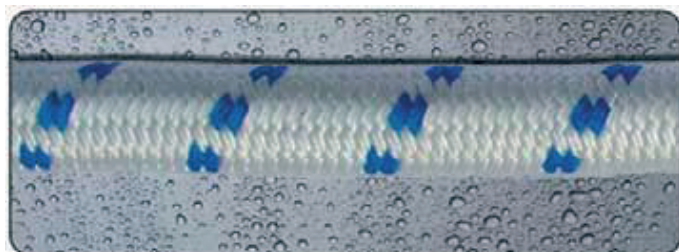

LANKOFORCE® with jacket is produced for applications where heat build-up and heavy abrasion is expected.

The presented data is with a **DYNEEMA®** jacket.

This is a durable jacket with excellent abrasion / heat resistance as well as with floating properties.

CONSTRUCTION - 12 strand braided with jacket

SPECIFIC GRAVITY - 0,986

UV RESISTANCE - excellent

ABRASION RESISTANCE - excellent

CHEMICAL RESISTANCE - good

MELTING POINT CORE - approx 147°C

MELTING POINT JACKET - approx 147°C

WATER ABSORPTION - 0%

TCLL VALUE - 100%

COLOUR - white

MARKER YARN - blue

Diameter mm	Weight g/m	MBF kN	MBF tf
14	110	105	10,7
16	153	149	15,2
18	205	200	20,4
20	237	267	27,2
22	286	332	33,9
24	324	409	41,7
26	398	492	50,2
28	460	583	59,5
30	526	670	68,4
32	611	767	78,3
34	696	863	88,1
36	776	970	99,0
38	852	1 084	111
40	911	1 177	120
42	978	1 303	133
44	1 156	1 544	158
48	1 380	1 782	182
50	1 408	1 923	196
52	1 570	2 141	218
56	1 840	2 283	233
60	2 095	2 635	269
64	2 360	2 983	304
68	2 730	3 508	358
72	3 050	3 938	402

Euroneema® becomes LANKOFORCE®

This is a name change only.

The specifications of the former Euroneema® ropes are exactly the same as those of the LANKOFORCE® ropes below.



Rev 1 07/2013

This data is for guidance purposes only and subject to changes without prior notice.

Lankhorst Euronete Portugal, SA
Rua da Cerfil (Cap. Gramaxo) PO Box 1029
4471-909 Maia - Portugal

Phone: +351 229 619 200
Fax: +351 229 605 757
e-mail: euronetesalesdepartment@lankhorsteuronete.com

