




## LANKOFORCE® HS HIGH STRENGTH WITH POLYESTER JACKET

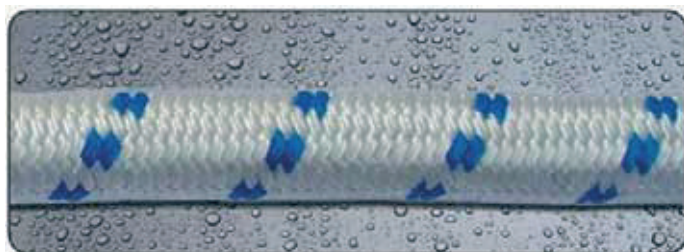

**Fuel saving – diameter reduction – high strength**

**LANKOFORCE®** with jacket is produced for applications where heat build-up and heavy abrasion is expected.

The presented data is with a polyester jacket. This is a durable jacket with excellent abrasion / heat resistance but with NON-floating properties.

CONSTRUCTION - 12 strand braided with jacket

SPECIFIC GRAVITY - 1,06

UV RESISTANCE - excellent

ABRASION RESISTANCE - very good

CHEMICAL RESISTANCE - good

MELTING POINT CORE - approx 147°C

MELTING POINT JACKET - approx 265°C

WATER ABSORPTION - 0%

TCLL VALUE - 100%

COLOUR - white

MARKER YARN - blue

Diameter mm	Weight g/m	MBF kN	MBF tf
14	113	105	10,7
16	156	149	15,2
18	221	200	20,4
20	261	267	27,2
22	310	332	33,9
24	350	409	41,7
26	426	492	50,2
28	490	583	59,5
30	558	670	68,4
32	645	767	78,3
34	732	863	88,1
36	814	970	99,0
38	892	1 084	111
40	970	1 177	120
42	1 040	1 303	133
44	1 220	1 544	158
48	1 390	1 782	182
50	1 476	1 923	196
52	1 640	2 141	218
56	1 950	2 283	233
60	2 210	2 635	269
64	2 480	2 983	304
68	2 860	3 508	358
72	3 190	3 938	402

**Euroneema® becomes LANKOFORCE®**

This is a name change only.

The specifications of the former Euroneema® ropes are exactly the same as those of the LANKOFORCE® ropes below.



Rev 1 07/2013

*This data is for guidance purposes only and subject to changes without prior notice.*

Lankhorst Euronete Portugal, SA  
Rua da Cerfil (Cap. Gramaxo) PO Box 1029  
4471-909 Maia - Portugal

Phone: +351 229 619 200  
Fax: +351 229 605 757  
e-mail: euronetesalesdepartment@lankhorsteuronete.com

