




LANKOFORCE® HS HIGHT STRENGTH WITH TIPTO® JACKET

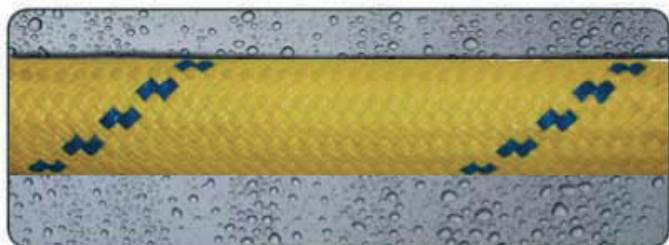

LANKOFORCE® with jacket is produced for applications where heat build-up and heavy abrasion is expected.

The presented data is with a **TIPTO®** jacket.

This is a durable jacket with excellent abrasion characteristics and is advised to be used for those applications where the load bearing core members needs to be protected against external heat built up and/or abrasion. This jacket has a specific gravity smaller than 1, which will keep the rope afloat.

CONSTRUCTION - 12 strand braided with jacket

SPECIFIC GRAVITY - 0,97

UV RESISTANCE - excellent

ABRASION RESISTANCE - very good

CHEMICAL RESISTANCE - good

MELTING POINT CORE - approx 147°C

MELTING POINT JACKET - approx 140°C

WATER ABSORPTION - 0%

TCLL VALUE - 100%

COLOUR - yellow

MARKER YARN - blue

Diameter mm	Weight g/m	MBF kN	MBF tf
14	109	105	10,7
16	151	149	15,2
18	186	200	20,4
20	218	267	27,2
22	266	332	33,9
24	303	409	41,7
26	375	492	50,2
28	436	583	59,5
30	500	670	68,4
32	583	767	78,3
34	667	863	88,1
36	745	970	99,0
38	820	1 084	111
40	956	1 177	120
42	1 025	1 303	133
44	1 205	1 544	158
48	1 375	1 782	182
50	1 460	1 923	196
52	1 623	2 141	218
56	1 860	2 283	233
60	2 115	2 635	269
64	2 380	2 983	304
68	2 750	3 508	358
72	3 070	3 938	402

Euroneema® becomes LANKOFORCE®

This is a name change only.
The specifications of the former Euroneema® ropes are exactly the same as those of the LANKOFORCE® ropes bellow.



Rev 1 07/2013

This data is for guidance purposes only and subject to changes without prior notice.

Lankhorst Euronete Portugal, SA
Rua da Cerfil (Cap. Gramaxo) PO Box 1029
4471-909 Maia - Portugal

Phone: +351 229 619 200
Fax: +351 229 605 757
e-mail: euronetesalesdepartment@lankhorsteuronete.com

